Sl No	No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
20	26	KSRB 15.3.1 : Providing 12mm thick cement plaster in single coat with cement mortar 1:6, to brick masonry including rounding off corners wherever reuired smooth rendering, : Providing and removing scaffolding, including cost of materials, labour. Curing complete as per specifications. Page No. 122/ Item No. 15.11/ PWD SR 2014-15	sqm							
		internal plastering	2x1	2	9.00		3.50	63.00		
			2x2	4	6.00		3.50	84.00		
		beams	6x2	12	6.20		0.60	44.64		
		Internal wall Gents Toilet		2	1.50		0.90	2.70		
				2	1.20		0.90	2.16		
				2	3.02		0.90	5.44		
				2	1.68		0.90	3.02		
				2	1.32		0.90	2.38		
				2	0.75		0.90	1.35		
		Ladies toilet		2	1.50		0.90	2.70		
				2	1.20		0.90	2.16		
				2	1.50		0.90	2.70		
				2	1.20		0.90	2.16		
				2	1.40		0.90	2.52		
				2	2.52		0.90	4.54		
								225.46		
		deduction D		2	1.80		2.10	7.56		
		w	8x2	16	2.00		1.50	48.00		
		V1	0.5	1	1.00		0.60	0.30		
		V2	0.5	5	0.75		0.60	1.13		
		D1	0.5	2	0.90		2.10	1.89		
		D2	0.5	3	0.75		2.10	2.36		
								61.24		
								164.22	140.98	23152.00
		Basic Rate	133.00							
		Area Weightage @ 6%	7.98							
		Total	140.98							
	27	KSRB 15.3.13 : Providing 12mm thick cement plaster in single coat with cement mortar 1:3, to ceiling including rounding off corners wherever required smooth rendering, Providing and removing scaffolding, including cost of materials, labour, curing complete as per specifications Page No. 109/ Item No. 15.21 PWD SR 2014-15	sqm							
		hall		1	6.90		4.60	31.74		
		Ladies Toilet		1	3.02		2.52	7.61		
		Gents Toilet		1	3.02		3.00	9.06		
								48.41	183.38	8877.00
		Basic Rate	173.00							
		Area Weightage @ 6%	10.38							
		Total	183.38							

Sl No	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
28	KSRB 15.7. Providing lime rendering for plastering to wall and ceiling, including cost of materials, labour, curing complete as per specifications. Page No. 124/ Item No. 15.33/ PWD SR 2014-15	sqm							
	qty same as item no 26+27						212.63		
	Basic Rate	20.00					212.63	21.20	4508.00
	Area Weightage @ 6%	1.20							
	Total	21.20							
29	KSRB 15.3.1 : Providing 12mm thick cement plaster in single coat with cement mortar 1:4, to brick masonry including rounding off corners wherever reuired smooth rendering, . Providing and removing scaffolding, including cost of materials, labour. Curing complete as per specifications. Page No. 122/ Item No. 15.10/ PWD SR 2014-15	sqm							
	external plastering		1	7.00		6.50	45.50		
	deduction D						45.50		
	w		1	1.80		2.10	3.78		
		2x2	4	2.00		1.50	12.00		
							15.78		
	Basic Rate	147.00					29.72	155.82	4631.00
	Area Weightage @ 6%	8.82							
	Total	155.82							
30	KSRB 10-2: Providing and laying integral cement based waterproofing treatment including preparation of surface as required for treatment of roofs, balconies, terraces etc, consisting of following application. (a) Applying and grouting a slurry coat of neat cement using 2.75kg/sqm conforming admixed with proprietary water proofing compound conforming to IS:2645 over the RCC slab after cleaning the surface before treatment. (b) laying cement concrete using broken brick bats 25mm to 100mm size with 50% of cement mortar 1:5 admixed with proprietary water proofing compound conforming IS:2645 over 20mm thick layer of cement layer of cement mortar 1:5 admixed with proprietary water proofing compound to required slope and treating similarly the adjoining walls upto 300mm height including rounding off junction of walls and slabs, (c) after two days of proper curing, applying a second coat of cement lurry admixed with proprietary water proofing compound (d) Finishing the surface with 20mm thick jointless cement mortar of mix 1:4 admixed	sqm							

No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	with proprietary water proofing compound and finally finishing the surface with trowel and neat cement slurry and making of 3000x300mm square, (e) the whole terrace so finished shall be flooded with water for a minimum period of two weeks for curing and for final test including cost of materials, labour complete as per specifications. Page No. 68/ Item No. 10.2/ PWD SR 2014-15								
		sqm							
			1	6.90		4.60	31.74		
							31.74	**859.66**	**27286.00**
	Basic Rate	811.00							
	Area Weightage @ 6%	48.66							
	Total	**859.66**							
31	Providing and laying flooring using pre polishing water cut/gang saw 19 mm thick Granite slab over existing cement concrete bed in CM 1:4 at 20mm thick (average) pointed with white cement/ colour pigment etc., complete. grey granite Page No. 115/ Item No. 14.47.2 / PWD SR 2014-15	sqm							
			1	6.90		4.60	31.74		
							31.74	**2052.16**	**65136.00**
	Basic Rate	1936.00							
	Area Weightage @ 6%	116.16							
	Total	**2052.16**							
32	KSRB 14.18.1: Providing skirting, dado, rises of steps with marble slabs not exceeding 30 cms. height on 10 cms. thick cement plaster 1:3 and jointed with white cement slurry over rough plaster surface (excluding cost of rough plastered surface white should be measured and paid separately) using marble slab of approved make and size of materials, labour, complete as per specifications. Specification No. KBS 14.19. Page No. 114/ Item No. 14.42 / PWD SR 2014-15	sqm							
		1x2	2	6.90		1.50	20.70		
		1x2	2	4.60		1.50	13.80		
	bath and W/c		3	5.40		2.10	34.02		
	Gents Toilet		1	12.03		2.10	25.26		
	Ladies Toilet		1	8.00		2.10	16.80		
							110.58		
	deduction		2	1.20		2.10	5.04		
	V1		1	1.00		0.60	0.60		
	V2		5	0.75		0.60	2.25		
	D1		2	0.90		2.10	3.78		
	D2		3	0.75		2.10	4.73		
							16.40		
							94.19	**3212.86**	**302613.00**
	Basic Rate	3031.00							
	Area Weightage @ 6%	181.86							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
	Total	3212.86							
33	FIXTURES for doors and windows Page No XIV SR 2014-15								
	DOORS								
	Hinges 5" heavyduty	Each	1	2			2	37.00	74
	Door locks	Each	1	1			1	401.00	401
	MS Clamps	Each	1	4			4	38.00	152
	Tower bolt 300mm long	Each	1	3			3	116.00	348
	Aluminiuam handles 15cms	Each	1	2			2	58.00	116
	Brass screws 25mm	Each	1	20			20	2.10	42
	Locking arrengments	Each	1	1			1	633.00	633
	Nails and screws	Kgs	1	1			1	54.00	54
	Bolts and nuts	Kgs	1	1			1	84.00	84
	GI J" or L" hooks with nuts and bolts	Each	1	1			1	17.00	17
	WINDOWS								
	Hinges 5" heavyduty	Each	4	5			20	37.00	740
	bottom lock nail	Each	4	3			12	47.00	564
	MS Clamps	Each	4	4			16	38.00	608
	center pully	Each	4	3			12	100.00	1200
	Brass screws 25mm	Each	4	40			160	2.10	336
34	KSRB 15-17.2: Applying priming coat over new wood surface and / or wood based surface after brushing with wood primer pink paint including preparing the surface after thoroughly cleaning oil, grease, dirt, and foreign matter, sand papering and knotting ready mix paint including cost of materials, labour, complete as per specifications. Page No. 127/ Item No. 15.56 / PWD SR 2014-15	sqm							
			4	1.80		2.10	15.12		
	Basic Rate	28.00					15.12	29.68	449.00
	Area Weightage @ 6%	1.68							
	Total	29.68							
35	KSRB 15-17.6: Providing and applying painting two coats (excluding priming coat) on new wood surface and / or wood based surface with enamel paint to give an even shade, cleaning the surface of all dirt, dust and foreign matter, sand papering including cost of materials, labour, complete as per specifications. Page No.125 / Item No. 15.60.1 / PWD SR 2011-12								
		qty same as item no					15.12		
	Basic Rate	78.00					15.12	82.68	1250.00
	Area Weightage @ 6%	4.68							
	Total	82.68							

No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
36	KSRB 15.15.1 : Providing and applying painting in two coats with plastic emulsion paint of approved brand on wall surface to give an even approved shade after thoroughly brushing the surface free from mortar drops and other foreign matter including preparing the surface even and sand paper smooth cost of materials, labour, complete as per specifications. with primer. Page No.126/ Item No. 15.51.2 / PWD SR 2014-15	sqm							
		qty same as item no					212.63		
							212.63	**67.84**	**14425.00**
	Basic Rate	64.00							
	Area Weightage @ 6%	3.84							
	Total	**67.84**							
37	KSRB 15-16 : Providing and finishing external walls in two coats with waterproof cement paint of approved brand and shade to given an even shade after thoroughly brooming the surface to remove all dirt and loose powdered material, free from mortar drops and other foreign matter cost of materials, labour, complete as per specifications with primer,page No 127 item No.15.53.2/PWD SR 2014-15								
		qty same as internal wall plastering					29.72		
							29.72	**79.50**	**2363.00**
	Basic Rate	75.00							
	Area Weightage @ 6%	4.50							
	Total	**79.50**							
38	KSRB 13-8.11 Providing and fixing to wall, ceiling and floor, low-density polyethylene pipes 6.00KGf/sq.cm. working pressure 25mm outside diameter with special flange, compression type fittings, wall clips, making good the wall, ceiling an floor including cost of all materials, labour charges, HOM of equipments and testing complete as per specifications. Specification No. 13.2.15.1 / 13.9,, Page No. 103/ Item No. 13.76 / PWD SR 2014-15	**Mtrs**							
			1	15.00			15.00		
							15.00	**109.18**	**1638.00**
	Basic Rate	103.00							
	Area Weightage @ 6%	6.18							
	Total	**109.18**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
39	KSRB 12-1.1 : Providing and laying in position to required level or slope 200mm internal diameter salt glazed stoneware pipes grade A and jointing with stiff mixture of cement mortar in proportion of 1:1, testing of pipes and joints, including cost of materials, labour charges complete as per specifications.Specification No. KBS 12.2 5/12 7 Page No. 72/ Item No. 11.1/ PWD SR 2014-15	Mtrs							
			1	10.00			10.00		
							10.00	**490.78**	**4908.00**
	Basic Rate	463.00							
	Area Weightage @ 6%	27.78							
	Total	**490.78**							
40	KSRB 11.11.6 : Providing and fixing white vitreous china clay, angle back wash basin of size 600x480mm with single 15mm C.P. brass pillar taps with C.I./M.S. brackets, 32mm C.P. brass waste of standard pattern, painting of fitting and brackets, cutting and making good the wall and floor wherever required, including cost of materials, labour complete as per specifications. Specification No. KBS 11 Page No. 82/ Item No. 12.28 PWD SR 2014-15	Unit							
			1	1			1		
							1	3132.30	3132.00
	Basic Rate	2955.00							
	Area Weightage @ 6%	177.30							
	Total	**3132.30**							
42	KSRB 11-1 : Providing and fixing white vitreous china clay, water closet Indian type (Squatting pan) of size 580mm with footrests, 100mm S or P trap, 10 litre low level, P. V. C. flushing cistern (all are approved make) with fittings, C.I. / M.S. brackets, 32mm diameter flush pipe fittings and clamps, overflow arrangements with specials and 25mm mosquito proof coupling of approved design, painting of fittings and brackets, cutting and making good the wall and floor wherever required, including cost of materials, labours complete as per specifications. Specification No. KBS 11 Page No. 79/ Item No. 12.1 PWD SR 2014-15	Unit							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
			1	4			4		
	Basic Rate	3369.00					4.00	3571.14	14285.00
	Area Weightage @ 6%	202.14							
	Total	**3571.14**							
43	KSRB 12-8.1 : Constructing brick masonry inspection chamber 455x610mm, and 450mm depth, (clear inside dimension) for single pipeline, using table moulded non-modular bricks of class designation 50 in cement mortar 1:5, C.I. cover with frame (light duty) 455x610mm internal dimensions, total weight of cover with frame to be not less than 38kg (weight of cover 23kg and weight of frame 15kg) R.C.C. top slab with cement concrete 1:2:4 mix 20mm and downsize granite metal, foundation concrete 1:5:10 with 40mm and downsize granite metal inside plastering 12mm thick with cement mortar 1:3, finish smooth with a floating coat of cement on walls and bed concrete complete as per standard design including cost of materials, labour charges, curing complete as per specificationsNo.KBS Page No. 75/ Item No. 11.50 PWD SR 2014-15	**Unit**							
			1	2			2		
	Basic Rate	6227.00					2	6600.62	13201.00
	Area Weightage @ 6%	373.62							
	Total	**6600.62**							
44	KSRB 11.15.3 : - Providing and fixing 1500x450mm rectangular shape mirror with plastic moulded frame of approved make and shade with 6mm thick hard board backing including cost materials, labour complete as per specifications Page No. 84 Item No. 12.43 PWD SR 2014-15	**Unit**							
			1	2			2		
	Basic Rate	1706.00					2	1808.36	3617.00
	Area Weightage @ 6%	102.36							
	Total	**1808.36**							

Sl No	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
47	Providing and fixing CI Nahani Trap of approved make conforming to ISI specifications and construction of cistern in CC 1:2:4 as per directions (Rate is inclusive of cost of materials and fixtures and conveyance of materials to work spot) Page No.92/ Item No. 12.113.2 PWD SR 2014-15	Each							
			1	2			2		
							2	265.00	530.00
	Basic Rate	250.00							
	Area Weightage @ 6%	15.00							
	Total	265.00							
48	KSRB 11-7.2 Providing and fixing white vitreous china clay, flat back, lipped front urinal basin of 430x260x350mm in the range of two 7.5 liters PVC automatic flushing cistern C.I./M.S. brackets, standard flush pipe and C.P. brass spreaders with brass unions and G.I. clamps complete painting of fitting and brackets cutting and making good the wall and floor wherever required including cost of materials, labour complete as per specifications. Specification No. KBS 11 Page No.80/ Item No. 12.8 PWD SR 2014-15	Each							
			1	2			2		
							2	4177.46	8355.00
	Basic Rate	3941.00							
	Area Weightage @ 6%	236.46							
	Total	4177.46							
49	KSRB 13.11.1: Providing and placing on terrace. Polyethylene water storage tanks with manhole lid and suitable locking arrangements, making holes of suitable diameter for inlet, outlet and over flow pipes, including cost of all materials, labour, transport charges, HOM of equipments and testing complete as per specifications. (For 1000 litre capacity) Specification NO. KBS 13.22 Page No. 103/ Item No. 13.78 / PWD SR 2014-15	Each							
			1	1			1		
							1	8851.00	8851.00
	Basic Rate	8350.00							
	Area Weightage @ 6%	501.00							
	Total	8851.00							

No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
50	Providing Supplying and commissioning of 1 HP submersible Monoblock pump with starter 15mm cable with necessary GI fittings with suction & Delivery hose pipes including necessary fittings etc completed as per specifications.	Nos	1				1.00		
							1.00	10000.00	10000.00
	Electrification work								
1	pointing wiring using copper with switch Supplying and wiring adoping loop system in exiting PVC conduit/casing caping using copper PVC insulated multi strand 2 x1.5 sqmm coper wire with a 6 Amps flush type SP control switch shall be fixed on the existing plastic sheet/gang box, the other end of wires shall be terminated with sufficient loose length in a wood/PVC round block. Complete for each outlet.II point wiring using class B materials (3/6) a) Short point upto 3 mtrs from tapping point to out let via switch	Each	9				9	160.00	1440.00
	Medium point above 3Mtrs upto 6Mtrs from taping point to out let via switch	Each	11				11	245.00	2695.00
	a) Long point above 6Mtrs upto 10 Mtrs from tapping point to out let via switch	Each	12				12	345.00	4140.00
2	Wiring for lightin/power circuit using one of PVC insulted 1100v grade,multistrand copper conductor single core cable in open or consealed system of wiring.II Group B e) 6 sqmm (9/20)	Each	350				350	45.00	15750.00
3	Groove Cutting : Supplying ... dia 2mm/2.5mm thick heavy gauage PVC Conduit Pipe with bends metal junction boxes adhesive paste etc., and bracing U or J hooks and cement plastering up to the surface of the brick level and run with 18 SWG GI fish wire run through out the conduit wherever necessary a) 19/20mm dia 2mm thick (2/3)	Per Mtr	85				85	43.00	3655.00
4	Supplying and fixing PVC/metal conduit accessories special type Junction Box a) 19/20mm junction box (3/5)	Each	5				5	18.00	90.00
	DEEP Junction Box a) 18/20 mm deep junction box	Each	10				10	29.00	290.00

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
5	32 Supplying and fixing metal fan box with round hook (32/11)	Each	8				8	72.00	576.00
6	Supplying and flush mounting teak wooden box with out front plank made of not less than 12mm thick wood after due groove cutting necessary masonry patch work complete. (6/3) b) 12"x9"x3" (300x228x76mm)	Each	2				2	80.00	160.00
7	Supplying and fixing of modular switch/Scocket/stepped electronic fan regulator/dimmer/telephone socket etc on existing modular switch plate. II using group B" Meterial (8/18) e) 600 watts dimmer	Each	8				8	390.00	3120.00
	g) 16 Amps one way switch	Each	2				2	115.00	230.00
	J) 6/16 Amps Universal Socket	Each	2				2	170.00	340.00
8	Supplying 4mm thick plastic sheet with necessary nitches for fixing switches regulators etc., and fixing on existing wooden or metal box using N.F.Screws. (22/10)	sq.cm	1500				1500	0.22	330.00
9	Supplying surface mounted type mirror optic luminaries for single/twin 36/40 watts fluorescent lamps cross rising of stove enameled deep coloured M.S low profile housing complete with all accessories and high purity anodized aluminium reflector assembling along with cross louvers including necessary fluorescent tubes with Energy saving Electronic Ballest Etc. complete set II 2x4' 36/40 watts B) group B' (5/17)	Each	4				4	2500.00	10000.00
10	supplying capacitor type celing fan complete with dawn blades,shackle,canopies etc for operation on 230 Volts, 50 cycles,single phase AC supply conforming to ISS-374-1979 and with double ball bearing system and as per technical data approved 1 48" Sweep(1200 mm) a) Regular Model (23/23)	Each	8				8	1800.00	14400.00
11	Supplying exhaust fan of 1440 RPM of 300mm (12") size with bracket blades complete for e for light duty suitable for operate on 230 V 50 Hz, AC Supply... a) Group A' (21/22)	Each	3				3	1250.00	3750.00

No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
12	Supply patty type fluorescent tube light fitting of 4-36/40 watts flourescent tube fitting,made out of M.S sheet and stove eanmeled with low loss open construction copper wound ferromagnetic ballast, strter,locking type prass contact holders mounted on double fold type sheet base fully wired for use on 230 volts A C supply including 1NO 4-36/40 watts fluorescent tube) (2/16) Group A	Each	2				2	360.00	720.00
13	Fixing all types and all capacities fluorescent/false celing/spot light/CFL fitting indoor on the wall/ celing/rafters/griders using 23/0.0076" twin twisted PVC insulated wires,required nos of blocks and clamps(if required) a) On wall/ ceiling/ Rafter/Griders (7/29)	Each	8				8	105.00	840.00
14	Fixing one ceiling/wall mounting fan of all capacities and all types to the exiting S hook with fan regular to the exiting board together with supplying and fixing a 5 ampers ceiling rose,necessary langth of 23/0.0076 inch PVC insulated twin twisted copper wire and wiring completely (8/29)	Each	8				8	105.00	840.00
15	Fixing one exhaust fan in the nitch already left in the wall with bolts and nuts 5 amps ceiling rose with sufficient length of 23/0.0076 inch PVC insulated twin core wire of apporoved Make (12/29)	Each	3				3	310.00	930.00

13

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
16	Supplying,fixing wiring earth electrode for grouding conduits. I.C cutouts and other equipment on the meter board using 40mm dia 2.90 thick GI2.5 mtrlong buried in a pit should be filled with equal proporation of salt and charcoal 150mm alround the pipe to complete depth. The conection from the pipe to the conduit etc is to be established throughGI wire of size as oer ISI specifications 7.33 of IS 732 using 12mm dia bolts,nuts,washers and checknuts etc,the pipe shall have 16 through holes 12mm dia (68/01)	Each	1				1	1950.00	1950.00
17	suplying and mixing miniature circuit breakers on exiting MCB distribution boards using necessary fixing materials and C type curve,indicator ON/OFF energy cross-3 with short circuit breaking capacity of 10k and complete wiring as required. a) 32 Amps SP 1)Group A (12/36)	Each	2				2	195.00	390.00
18	Energy meter box. Supply and instalation/fixing/ provision of outdoor type thermoplastic modular panel enclousers with transperent polycarbonate lid shock proof,coreosion proof having internally embedded gasket on both lid and flap suitable to fix. Single phase/three phase energy meter in suitable base plate and having a provision fo fuse/ MCB cutout with suitable transperent hinged flap opening for operating MCB along with complete tamper proof SEALING facility. a) 300 x 300 x 214 mm (40/42)	Each	1				1	3055.00	3055.00
19	Supplying of LT UG cable having aluminium conductor PVC insulated,sheathed,galvanized,steel wire/steel tap armoured cable with PVC outer sheathing 1.1KV class A PVC Cabled)4 core 16 sqmm (68/04)	Per Mtr	40				40	150.00	6000.00

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
20	Labour charges for laying of 1 1KV Class UG cable in existing trench GI pipe stoneware pipe/on wall/on pole as required a) 6sqmm to 16 10 sqmm (5/69)	R Mtr	40				40	8 00	320 00
21	Digging of trench of 0 6mm deep * 0 50 mtr wide refilling the trench to the required ground level and consolidating etc. complete (As per Civil SR KSRB 1-2p-7)a in Ordinary soil (6/70)	R Mtr	30				30	40 00	1200 00
22	Supplying and fixing of class A (medium duty) GI pipe of wall thick ness not lessthan 3 25mm on pole/wall/drain crossing eith necessary clamping arrangements for UG cable of 1 1 KV class B 50 mm (9/70)	Mtr	10				10	260 00	2600 00
23	Suplying and fixing L T cast Iron Pot Heads suitable for 1 1KV class UG cable filled with Necessary bitumen/insulating compound complete with terminals,clamps,bolts,nuts and washers etc, b 16 Sqmm (10/70)	Each	1				1	260 00	260 00
						Total B)			1472868.00
	ABSTRACT								
	A) DRILLING OF BOREWELL								456022 03
	B) CONSTRUCTION OF DHOBHI GHAT HALL & TOILET								1472868 00
	1% Quality control charges								19288 90
39	Miscelaneous and rounding off								1821 07
								TOTAL	1950000.00

(Rupees Ninteen lakhs Fifty thousand Only)

CERTIFICATE

1 nj

2 The Estimate is prepared as per the PRED SR 2012-13 and PW,P & IWTD SR 2014-15 and BWSSB Electrical SR 2014-15

3 The provisions were made in this estimate are necessary and adequate

4 This works come under B B M P limits

Assistant Engineer

Assistant Executive Engineer
Yelahanka Sub Division
Bangalore-64

Executive Engineer
Yelahanka Division
Bangalore-64

Administrative Sanction for Rs. 19.50 Lakh
Nineteen Lakh only Fifty Thousand only
is accorded under head P. 1771 2014-15
Registered as CE No. ..... Subject to conditions contained in enclosed memo No. CE/YNE/AA/29/14-15 Dt. 27-10-14

AE/E TA CE(YNK)

TECHNICALLY SANCTIONED FOR Rs. 19.50 Lakh
Rupees Nineteen Lakh & Fifty Thousand only
Under P. 1771-2014-15
Registered as CE ( ) No. .....
Subject to conditions contained enclosed memo EE ( ) No. .....
Dt. ..... Estimate / Sanction
Dated 28-10-2014 Rs. 19.50 Lac

Yelahanka, Bangalore

Construction of Dhobhi ghat near yelahanka lake in Ward No-01 of yelahanka sub-division.

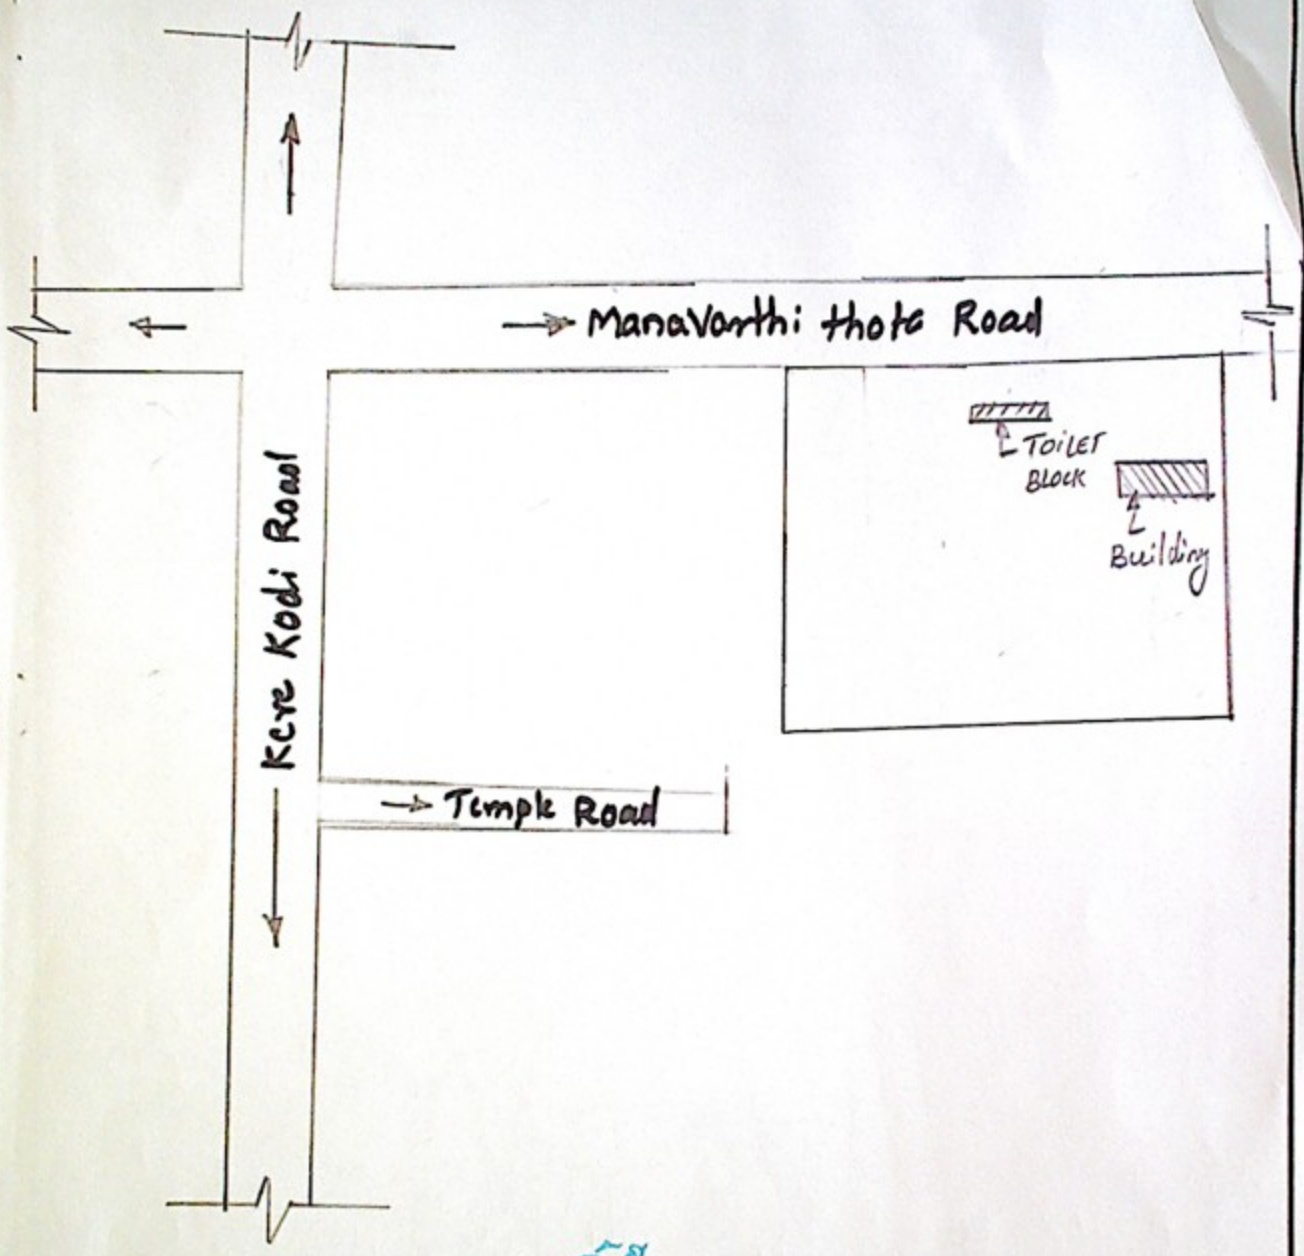

Asst. Executive Engineer
Yelahanka Sub. Divison
(BBMP Ynk. Zn)
Yelahanka, Bangalore